


FLOOR HEATING CABLE (FHC-DF-15.7)

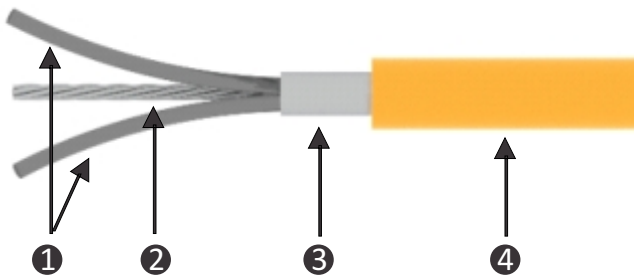

- 1 FEP Insulated Dual Heating Element
- 2 Multi-strand Earth Wire
- 3 Al Foil for 100% Shielding
- 4 PVC (HR-FR) Insulated Outer Jacket

Construction

Element Conductor size	0.050mm ² / 0.13mm ² CuNi- Two Core
Insulation	FEP
Shielding	Aluminium Foil For 100% Coverage
Earth Wire	TPC 0.50mm ² (Multi-strand)
Jacket	PVC (HR-FR)
Power Output per Meter	15.7 Watt / Meter
Standard Voltage	230 Volt AC

Range

Model	Watts	Cable Length (Meter)
FHC-DF-15.7-150	150	9.55
FHC-DF-15.7-187.5	187.5	11.94
FHC-DF-15.7-225	225	14.33
FHC-DF-15.7-262.5	262.5	16.72
FHC-DF-15.7-300	300	19.11
FHC-DF-15.7-337.5	337.4	21.50
FHC-DF-15.7-375	375	23.89
FHC-DF-15.7-450	450	28.66
FHC-DF-15.7-525	525	33.44
FHC-DF-15.7-600	600	38.22
FHC-DF-15.7-675	675	42.99
FHC-DF-15.7-750	750	47.77
FHC-DF-15.7-900	900	57.32
FHC-DF-15.7-1050	1050	66.88
FHC-DF-15.7-1200	1200	76.43
FHC-DF-15.7-1350	1350	85.99
FHC-DF-15.7-1500	1500	95.54
FHC-DF-15.7-1650	1650	105.10
FHC-DF-15.7-1800	1800	114.65
FHC-DF-15.7-1950	1950	124.20
FHC-DF-15.7-2250	2250	143.31