


FLOOR HEATING CABLE (FHC-DE-240V-03)

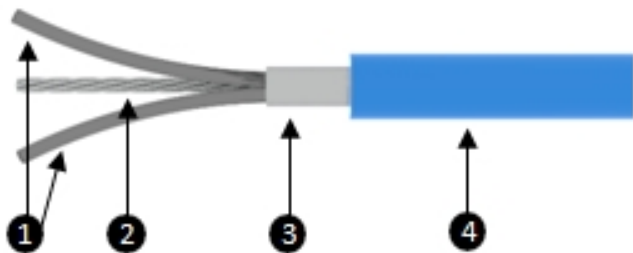

- 1 ETFE Insulated Dual Heating Element
- 2 Multi-strand Earth Wire
- 3 Al Foil for 100% Shielding
- 4 PVC (HR-FR) Insulated Outer Jacket

Construction

Element Conductor size	0.125mm ² /0.54mm ² CuNi/Cu/SS/kanthal- Two Core Solid
Insulation	ETFE
Shielding	Aluminium Foil For 100% Coverage
Earth Wire	TPC 1.0mm ² (Multi-strand)
Jacket	PVC (HR-FR)
Power Output per Foot	03 Watt / Foot
Standard Voltage	240 Volt AC

Range

Model	Watts	Cable Length (Foot)
FHC-DE-240V-03-120	120	40
FHC-DE-240V-03-180	180	60
FHC-DE-240V-03-240	240	80
FHC-DE-240V-03-300	300	100
FHC-DE-240V-03-360	360	120
FHC-DE-240V-03-420	420	140
FHC-DE-240V-03-480	480	160
FHC-DE-240V-03-540	540	180
FHC-DE-240V-03-600	600	200
FHC-DE-240V-03-660	660	220
FHC-DE-240V-03-720	720	240
FHC-DE-240V-03-840	840	280
FHC-DE-240V-03-960	960	320
FHC-DE-240V-03-1080	1080	360
FHC-DE-240V-03-1200	1200	400
FHC-DE-240V-03-1320	1320	440
FHC-DE-240V-03-1440	1440	480
FHC-DE-240V-03-1680	1680	560
FHC-DE-240V-03-1920	1920	640
FHC-DE-240V-03-2160	2160	720
FHC-DE-240V-03-2400	2400	800