


## FLOOR HEATING CABLE (FHC-SP-12.5)

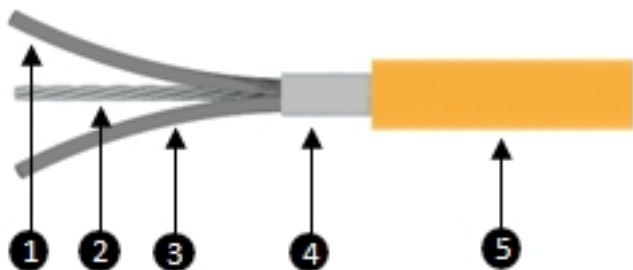

- 1 PTFE Insulated Heating Element
- 2 Solid Earth Wire
- 3 PTFE Insulated Return Wire
- 4 Al Foil for 100% Shielding
- 5 PVC (HR-FR) Insulated Outer Jacket

### Construction

Element Conductor size	0.013mm <sup>2</sup> /0.36mm <sup>2</sup> CuNi/SS/Kanthal/Cu- Single Core
Insulation	PTFE
Shielding	Aluminium Foil For 100% Coverage
Earth Wire	TPC 1.0mm - 1.20mm (Solid)
Jacket	PVC (HR-FR)
Power Output per Meter	12.5 Watt / Meter
Standard Voltage	230 Volt AC

### Range

Model	Watts	Cable Length (Meter)
FHC-SP-12.5-50	50.0	4
FHC-SP-12.5-85	85	6.76
FHC-SP-12.5-150	150	12.50
FHC-SP-12.5-225	225	17.66
FHC-SP-12.5-300	300	23.77
FHC-SP-12.5-375	375	29.87
FHC-SP-12.5-450	450	35.97
FHC-SP-12.5-525	525	41.56
FHC-SP-12.5-600	600	47.67
FHC-SP-12.5-675	675	53.77
FHC-SP-12.5-750	750	59.87
FHC-SP-12.5-900	900	71.57
FHC-SP-12.5-1050	1050	83.77
FHC-SP-12.5-1200	1200	95.47
FHC-SP-12.5-1350	1350	107.67
FHC-SP-12.5-1700	1700	136
FHC-SP-12.5-2050	2050	164
FHC-SP-12.5-2400	2400	192
FHC-SP-12.5-2700	2700	216
FHC-SP-12.5-3050	3050	244