


FLOOR HEATING CABLE (FHC-SX-10)

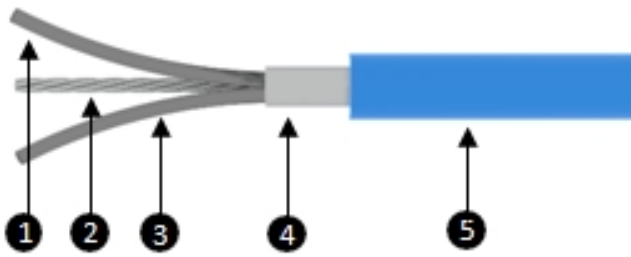

- 1 XLPE Insulated Heating Element
- 2 Solid Earth Wire
- 3 XLPE Insulated Return Wire
- 4 Al Foil for 100% Shielding
- 5 PVC (HR-FR) Insulated Outer Jacket

Construction

Element Conductor size	0.028mm ² /0.40mm ² CuNi/SS- Single Core
Insulation	XLPE
Shielding	Aluminium Foil For 100% Coverage
Earth Wire	TPC 1.0mm (Solid)
Jacket	PVC (HR-FR)
Power Output per Meter	10 Watt / Meter
Standard Voltage	230 Volt AC

Range

Model	Watts	Cable Length (Meter)
FHC-SX-10-100	100	10.0
FHC-SX-10-200	200	20.0
FHC-SX-10-300	300	30.0
FHC-SX-10-400	400	40.0
FHC-SX-10-500	500	50.0
FHC-SX-10-600	600	60.0
FHC-SX-10-800	800	80.0
FHC-SX-10-1000	1000	100.0
FHC-SX-10-1200	1200	120.0
FHC-SX-10-1500	1500	150.0
FHC-SX-10-1900	1900	190.0