


FLOOR HEATING MAT (FHM-SX-200)

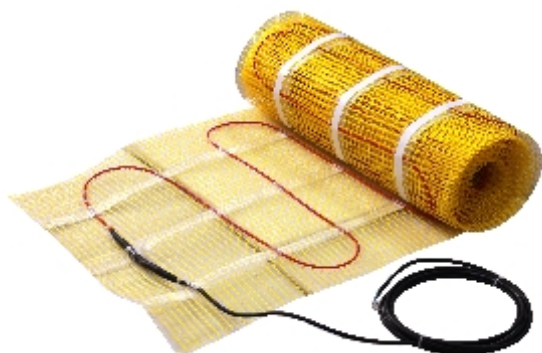

- Heating Cable of 17 w/m
- XLPE Insulation on heating core
- Al Foil Shield With Solid Earth Wire
- Sticky FG Mesh/Non-Sticky FG Mesh/Cross Filament Tape
- Double sided tissue tape / PP tape
- PVC Outer Jacket (Heat Resistance)
- Separate Cold Tail of 3.5 meter.

Construction

Heating Cable	17.0 watt / meter
Spacing	Sticky FG Mesh/ Non-Sticky FG Mesh/ Cross Filament Tape
Core Insulation	XLPE
Shielding	Aluminium Foil For 100% Coverage
Earth Wire	TPC 1.0mm (Solid)
Jacket	PVC (HR FR)
Power Output per Meter ²	200 Watt / Meter ²
Standard Voltage	230 Volt AC

Range

Model	Watts	Mat Area (m ²)
FHM-SX-200-200	200	1.00
FHM-SX-200-300	300	1.50
FHM-SX-200-400	400	2.00
FHM-SX-200-500	500	2.50
FHM-SX-200-600	600	3.00
FHM-SX-200-700	700	3.50
FHM-SX-200-850	850	4.25
FHM-SX-200-1000	1000	5.00
FHM-SX-200-1250	1250	6.25
FHM-SX-200-1500	1500	7.50
FHM-SX-200-1700	1700	8.50
FHM-SX-200-2100	2100	10.50
FHM-SX-200-2600	2600	13.00
FHM-SX-200-2900	2900	14.50
FHM-SX-200-3300	3300	16.50