


THERMOCOUPLE WITH HEAD & TIP ASSEMBLY

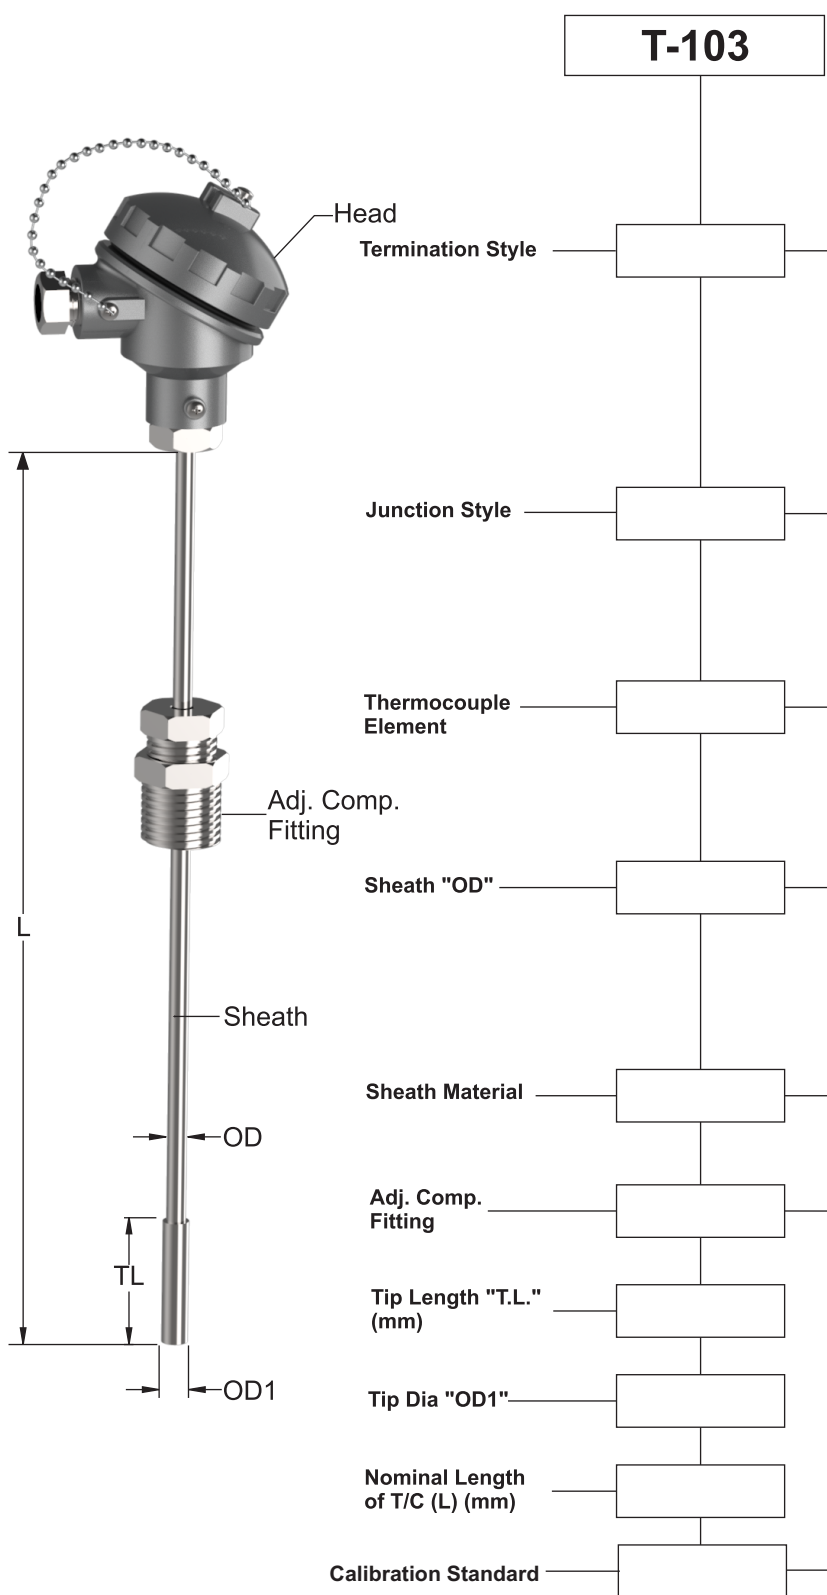

| | |
|-----|--|
| A | Die cast Alu A TYPE |
| B | Die cast Alu B TYPE |
| C1 | Die cast Alu IP-67 (Single Entry) |
| C2 | Die cast Alu IP-67 (Double Entry) |
| SS | SS- Head |
| M | Miniature Die cast Aluminium |
| P | Plastic |
| EB1 | Die cast Alu Explosion / Flame proof IIB (Zone1 & 2) |
| EB2 | SS Explosion / Flame proof IIB (Zone1 & 2) |
| EC1 | Die cast Alu Explosion / Flame proof IIC (T6) |
| EC2 | SS Flame proof IIC (T6) |
| EC3 | Die cast Alu Explosion / Flame proof IIC (T6) ATEX |

| | |
|----|------------|
| GN | Grounded |
| UN | Ungrounded |

| Type of T/C | Description |
|-------------|-------------------------------|
| K | Chromel/Alumel |
| J | Iron/Constantan |
| N | Nicrosil-Nisil |
| T | Copper/Constantan |
| E | Chromel/Constantan |
| Other | Consult Factory |
| Ex. : | If Simplex - K Duplex - KK |

| | |
|-------|-----------------|
| 1 | Ø1mm |
| 1.5 | Ø1.5mm |
| 3 | Ø3mm |
| 4.5 | Ø4.5mm |
| 6 | Ø6mm |
| 8 | Ø8mm |
| Other | Consult Factory |

| | |
|-------|-----------------|
| 316 | SS 316 |
| 310 | SS 310 |
| 600 | Inconel-600 |
| Other | Consult Factory |

| | |
|-----------------|--------------------------------|
| Threads | 1/4" |
| | 1/2" |
| | 3/8" |
| | 3/4" |
| | 1" |
| | 1 1/4" |
| B.S.P. / N.P.T. | 1 1/2" |
| | 2" |
| | M-Thread |
| M-Thread | M20X1.5, M18X1.5, M33X2, M27X2 |
| Other | Consult Factory |
| N/A | Not Applicable |

| | |
|---|-------------|
| A | ANSI MC96.1 |
| D | DIN |
| I | IEC |