


# THERMOCOUPLE WITH WELD PAD & CABLE

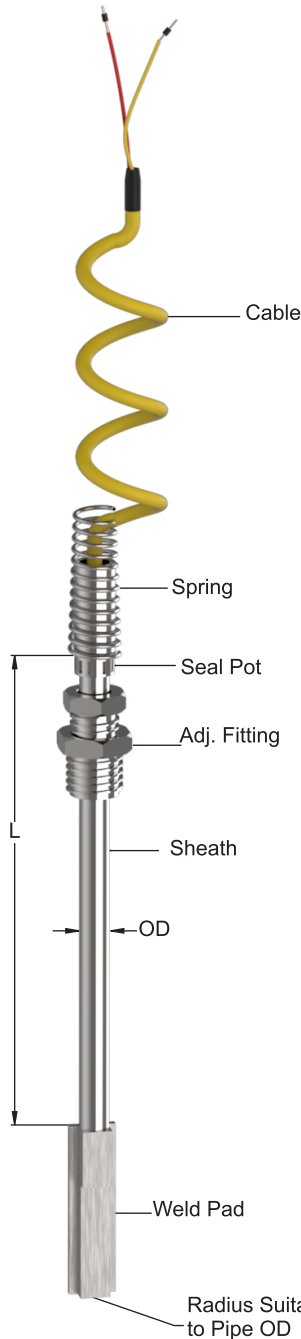

T-206

Thermocouple Element

Type of T/C	Description
K	Chromel/Alumel
J	Iron/Constantan
N	Nicrosil-Nisil
T	Copper/Constantan
E	Chromel/Constantan
Other	Consult Factory
Ex. :	If Simplex - K Duplex - KK

Sheath "OD"

1	Ø1mm
1.5	Ø1.5mm
3	Ø3mm
4.5	Ø4.5mm
6	Ø6mm
8	Ø8mm
Other	Consult Factory

Sheath Material

316	SS 316
310	SS 310
600	Inconel-600
Other	Consult Factory

Junction Style

GN	Grounded
UN	Ungrounded

Weld Pad

A	25X25X50mm, Adj.
B	35X25X15mm, Adj.
C	25X25X5mm, Fixed
Other	Consult Factory

Weld Pad Material

A	SS 316
B	SS 310
Other	Consult Factory

Nominal Length of T/C "L" (mm)

A	Teflon/Teflon Insulated Flexible Cable
B	Teflon Insulated & SS Braided Flexible Cable
C	FG/FG Insulated Flexible Cable
D	PVC/PVC Insulated Flexible Cable
E	FG/FG/Insulated/SS Braided
Other	Consult Factory

Type of Cable

Cable Length (mm)

Calibration Standard

A	ANSI MC96.1
D	DIN
I	IEC