


THERMOCOUPLE WITH CONNECTOR

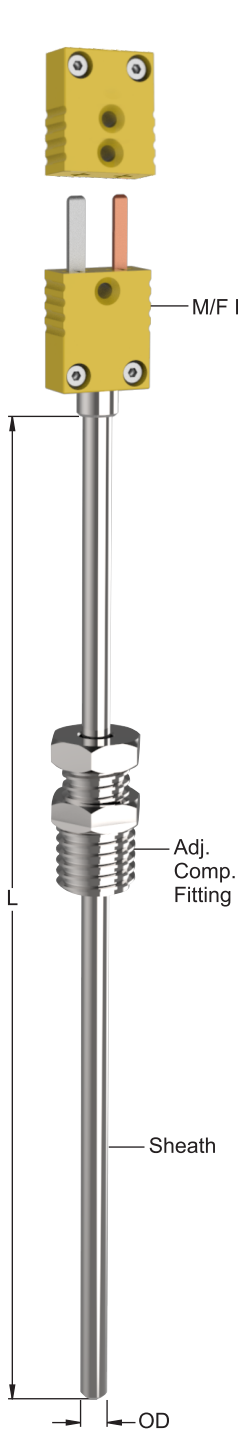

T-343

Termination Style

A	Standard Plug / Socket
B	Miniature Plug / Socket
C	3 Pin BSM Connector
Other	Consult Factory

Junction Style

GN	Grounded
UN	Ungrounded

Thermocouple Element

Type of T/C	Description
K	Chromel/Alumel
J	Iron/Constantan
N	Nicrosil-Nisil
T	Copper/Constantan
E	Chromel/Constantan
Other	Consult Factory
Ex. :	If Simplex - K Duplex - KK

Sheath "OD"

1	Ø1mm
1.5	Ø1.5mm
3	Ø3mm
4.5	Ø4.5mm
6	Ø6mm
8	Ø8mm
Other	Consult Factory

Sheath Material

316	SS 316
310	SS 310
600	Inconel-600
Other	Consult Factory

Fitting

Threads	1/4"	
	1/2"	
	3/8"	
	3/4"	
	B.S.P. / N.P.T.	1"
		1 1/4"
		1 1/2"
2"		
M-Thread	M20X1.5, M18X1.5, M33X2, M27X2	
Other	Consult Factory	
N/A	Not Applicable	

Nominal Length of T/C (L) (mm)

Calibration Standard

A	ANSI MC96.1
D	DIN
I	IEC