


FLOOR HEATING CABLE (FHC-SP-15.7)

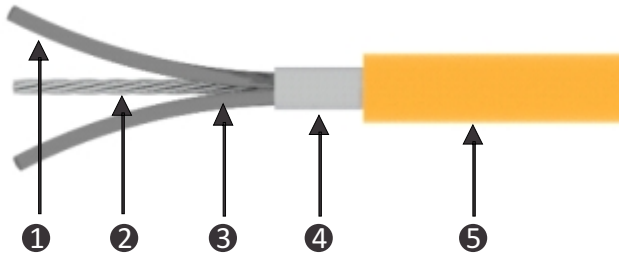

- 1 PTFE Insulated Heating Element
- 2 Multi-strand Earth Wire
- 3 PTFE Insulated Return Wire
- 4 Al Foil for 100% Shielding
- 5 PVC (HR-FR) Insulated Outer Jacket

Construction

Element Conductor size	0.013mm ² / 0.36mm ² CuNi/SS/Kanthal/Cu- Single Core
Insulation	PTFE
Shielding	Aluminium Foil For 100% Coverage
Earth Wire	TPC 1.0mm- 1.25mm (Multi-strand)
Jacket	PVC (HR-FR)
Power Output per Meter	15.7 Watt / Meter
Standard Voltage	230 Volt AC

Range

Model	Watts	Cable Length (Meter)
FHC-SP-15.7-113	113	7.50
FHC-SP-15.7-150	150	10.00
FHC-SP-15.7-188	188	12.50
FHC-SP-15.7-225	225	15.00
FHC-SP-15.7-263	263	17.50
FHC-SP-15.7-300	300	20.00
FHC-SP-15.7-338	338	22.50
FHC-SP-15.7-375	375	25.00
FHC-SP-15.7-450	450	30.00
FHC-SP-15.7-525	525	35.00
FHC-SP-15.7-600	600	40.00
FHC-SP-15.7-675	675	45.00
FHC-SP-15.7-750	750	50.00
FHC-SP-15.7-900	900	60.00
FHC-SP-15.7-1050	1050	70.00
FHC-SP-15.7-1200	1200	80.00
FHC-SP-15.7-1350	1350	90.00
FHC-SP-15.7-1500	1500	100.00