


## FLOOR HEATING CABLE (FHC-SX-17)

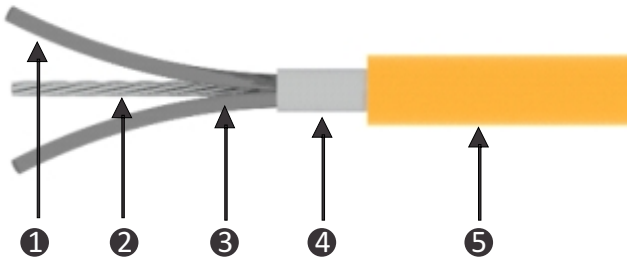

- 1 XLPE Insulated Heating Element
- 2 Solid Earth Wire
- 3 XLPE Insulated Return Wire
- 4 Al Foil for 100% Shielding
- 5 PVC (HR-FR) Insulated Outer Jacket

### Construction

Element Conductor size	0.11mm <sup>2</sup> /0.34mm <sup>2</sup> CuNi/SS- Single Core
Insulation	XLPE
Shielding	Aluminium Foil For 100% Coverage
Earth Wire	TPC 0.75mm <sup>2</sup> (Solid)
Jacket	PVC (HR-FR)
Power Output per Meter	17 Watt / Meter
Standard Voltage	230 Volt AC

### Range

Model	Watts	Cable Length (Meter)
FHC-SX-17-150	150	8.8
FHC-SX-17-300	300	17.6
FHC-SX-17-400	400	23.5
FHC-SX-17-500	500	29.4
FHC-SX-17-600	600	35.3
FHC-SX-17-700	700	41.2
FHC-SX-17-850	850	50
FHC-SX-17-1000	1000	58.8
FHC-SX-17-1250	1250	73.5
FHC-SX-17-1500	1500	88.2
FHC-SX-17-1700	1700	100
FHC-SX-17-2100	2100	123.5
FHC-SX-17-2600	2600	152.9
FHC-SX-17-2900	2900	170.6
FHC-SX-17-3300	3300	194.1